

N E W P R O D U C T R A N G E

KEYLIGHTING


L I G H T I N G T E C H N O L O G Y



Galaxy

A stylish tough exterior fitting the Galaxy impressively illuminates your more sensitive areas. Designed to give a wide spread of light giving that extra feeling of security for your staff or the public. Easy to mount, IP65 sealed and available with 70 watt SON, HQI light sources we have units also to run the new highly efficient PLT range lamps in 42 and 57 watt versions, both run from quality high frequency control gear. The integral photo cell unit does not affect its brilliant good looks. The unit can accept wiring from three sides via 20mm conduit or from the rear with standard wiring.

PART NO	DESCRIPTION	WEIGHT
GA-70WP-SON	70 WATT SON GALAXY WALL PACKET	2.94kg
GA-70WP-SON-PH	70 WATT SON GALAXY WALL PACKET WITH PHOTOCELL	3.02kg
GA-70WP-HQI	70 WATT SON GALAXY WALL PACKET	3.15kg
GA-70WP-HQI-PH	70 WATT SON GALAXY WALL PACKET WITH PHOTOCELL	3.23kg
GA-42WP-PLT	42 WATT SON GALAXY WALL PACKET	1.98kg
GA-42WP-PLT-PH	42 WATT SON GALAXY WALL PACKET WITH PHOTOCELL	2.06kg

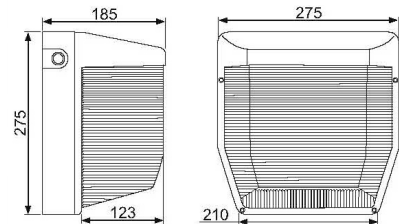


Kolorado

The new architectural floodlight range is from a bold Italian design to compliment the most modern buildings and flatter contemporary ones also. It's design is modern and neat visually improving the facades of many buildings and finishing off your utility areas with that extra bit of style.

The single piece die cast body, housing separate lamp and gear compartments, is sealed to IP65. With a toughened glass front and an easy to use clip system this makes installation and maintenance easy. The unit is finished in RAL9006 silver to give it a unique quality appearance and to compliment any surroundings. We have two body sizes suiting lamp wattages from 70 to 400 watts (HQI or SON). A range of coloured HQI lamps are available to complement your corporate colours.




PART NO	DESCRIPTION	WEIGHT
KO-70SON	70 WATT SON KOLORADO SILVER FLOOD	5.83kg
KO-70HQI	70 WATT HQI KOLORADO SILVER FLOOD	5.92kg
KO-150SON	150 WATT SON KOLORADO SILVER FLOOD	9.67kg
KO-150HQI	150 WATT HQI KOLORADO SILVER FLOOD	6.52kg
KO-250SON	250 WATT SON KOLORADO SILVER FLOOD	9.59kg
KO-250HQI	250 WATT HQI KOLORADO SILVER FLOOD	7.62kg
KO-400SON	400 WATT SON KOLORADO SILVER FLOOD	12.37kg
KO-400HQI	400 WATT HQI KOLORADO SILVER FLOOD	10.72kg

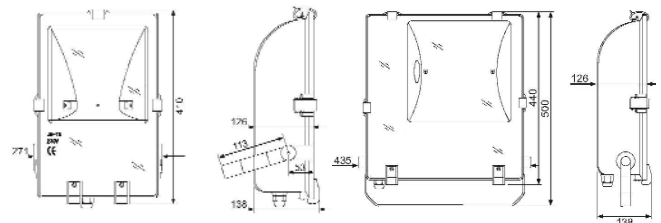

Eco Flood

Our economy 70 watt flood light is a suitable way for illuminating large domestic or smaller commercial external areas with low wattage efficient flood light. Polycarbonate construction and an anodised reflector give a vandal resistant long life product. The unit has Philips gear and lamp to complete the package.

PART NO	DESCRIPTION	WEIGHT
KO-70SON-ECO	70 WATT SON ECO FLOOD WITH LAMP	3.92KG
KO-70HQI-ECO	70 WATT HQI ECO FLOOD WITH LAMP	3.50KG
PH	INTEGRAL PHOTOCELL ADD SUFFIX TO PART NO	0.08kg

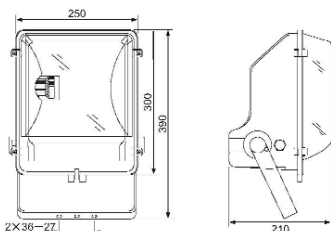

Post-Top Fittings

A black polycarbonate injection moulded base with integral gear, with either an acrylic or polycarbonate globe.

A choice of two reflector stacks for use in the clear globes are available as is a choice of globe to suit the application, including a capped version to reduce lighting pollution.

The whole fitting is IP65 rated and available in 60 or 76mm post-top entry.

PART NO	DESCRIPTION	WEIGHT
GEAR OPTIONS		
PTP2-70HQI	70 watt HQI Gear & Lamp (450 or 500mm Globe)	2.20kg
PTP2-150HQI	150 watt HQI Gear & Lamp (500mm Globe)	2.75kg
PTP2-70SON	70 watt SON Gear & Lamp (400, 450 or 500mm Globe)	2.10kg
PTP2-150SON	150 watt SON Gear & Lamp (450 or 500mm Globe)	2.70kg
GLOBE OPTIONS		
SHR401	400mm Acrylic Globe (for Polycarb add PC)	0.87kg
SHR451	450mm Acrylic Globe (for Polycarb add PC)	1.60kg
SHR451-PC-CAP	500mm Polycarbonate Capped Globe	1.60kg
SHR501	500mm Acrylic Globe (for Polycarb add PC)	1.97kg
SHR501-PC-CAP	500mm Polycarbonate Capped Globe	1.97kg
REFLECTOR OPTIONS		
RFT-SIL	Anodised Aluminium Reflector Stack	0.60kg
RFT-504	Fresnel Lens Type Reflector Stack	0.89kg




Obelisk

An architectural and modern alternative to the standard Globe post top range. This IP65 rated stylish post top is ideal when a more decorative product is required.

Manufactured from a die-cast aluminium housing and polycarbonate lens and anodised aluminium reflector stack and cover.

Suitable for 76mm post entry only.

PART NO	DESCRIPTION	WEIGHT
OB70-HQI	70 watt HQI Obelisk Post top	11.40kg
OB150-HQI	150 watt HQI Obelisk Post top	12.00kg

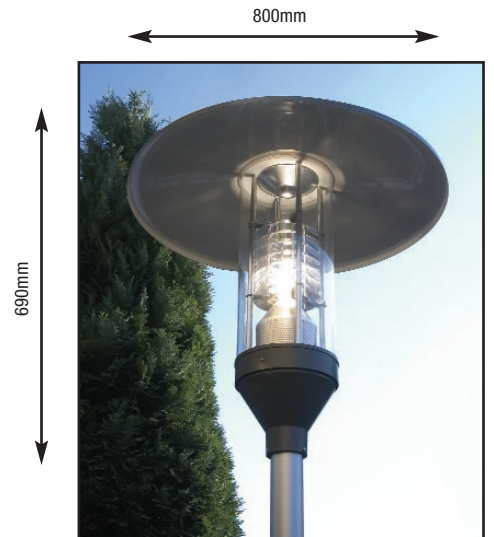

Vortex

A range of aluminium bollards available in 2 gear options.

It is epoxy polyester powder coated in a corrosion resistant paint finish, and features a plate for flange mounting. All screws have an allen key head for added security.

This highly attractive bollard gives a light spread of up to 8m in diameter around itself making it ideal for car parks and footpaths.

PART NO	DESCRIPTION	HEIGHT	DIAMETER	WEIGHT
VO200-70HQI	70 watt HQI Vortex Bollard (G12)	900mm	200mm	6.98kg
VO200-70SON	70 watt SON Vortex Bollard (E27)	900mm	200mm	6.80kg



Maxilux

A polycarbonate IP65 rated vandal resistant low energy bulkhead. This fitting comes complete with a removable gear tray and the option of fitting torx screws for added security. It is an ultra-slim product suitable for vandal prone and weather exposed areas.

PART NO	DESCRIPTION	DEPTH	DIAMETER	WEIGHT
KL031-2D8	28w 2D Maxilux	90mm	290mm	1.75kg
KL031-2D8-HF-EM	28w 2D Emergency Maxilux	90mm	290mm	1.85kg
KL031-2D38	38w 2D Maxilux	90mm	290mm	1.75kg



Onyx


An IP65 rated heavy duty exterior bulkhead, available in 2 sizes. It has a die cast aluminium body and opal diffuser (current stock is glass, changing to polycarbonate). This product can be surface mounted or semi-recessed, to suit any application.

PART NO	DESCRIPTION	LENGTH	DIAMETER	WEIGHT
ON250-GLS	60 watt GLS Onyx Bulkhead	90mm	250mm	2.05kg
ON250-2D6	16 watt 2D Onyx Bulkhead	90mm	250mm	2.35kg
ON250-26PLT	26 watt PLT Onyx Bulkhead	90mm	250mm	2.65kg
ON350-2D8	28 watt 2D Onyx Bulkhead	120mm	350mm	5.15kg
ON350-2D8-EM	28 watt 2D Emergency Onyx	120mm	350mm	5.25kg
ON350-2D38	38 watt 2D Onyx Bulkhead	120mm	350mm </td <td>5.25kg</td>	5.25kg



Zarta

The Zarta sign light features a slender corrosion resistant body constructed from extruded aluminium, with die cast end caps. It is IP65 rated and comes fitted as standard with a silicone rubber cable. It is available in a choice of four wattages of T5 lamps, which are behind an impact resistant plastic front. It attaches to the wall by means of two mounting brackets which allow the sign light to be angled as required.

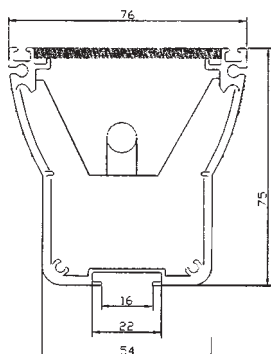

PART NO	DESCRIPTION	LENGTH	WEIGHT
ZA14	14 Watt T5 Sign Light	600	1.20kg
ZA21	21 Watt T5 Sign Light	900	2.10kg
ZA28	28 Watt T5 Sign Light	1200	2.80kg
ZA35	35 Watt T5 Sign Light	1500	2.40kg