

KEYLIGHTING

North Brook Works, Alkincote Street, Keighley, BD21 5JT Tel: 01535 616 300 Fax: 01535 616 301
Email: sales@keylighting.co.uk Web: www.keylighting.co.uk



General

An attractive exterior bollard sealed to IP65 and finished in weather resistant epoxy polyester paint. The bollard is suitable for flange mounting only.

Construction

The main housing is constructed from an extruded heavy duty aluminium tube. The head of the bollard is again manufactured from die-cast aluminium and features a clear polycarbonate tube. Inside the head are two spun aluminium reflectors. The bollard is mounted and sealed onto an aluminium circular flange plate.




Packaging

All units are supplied individually boxed and are 100% tested prior to packing and despatch

Installation

The vortex is supplied with the lamp fitted and a 1m pre wired cable for ease of installation. This allows for the seals to remain untouched during installation ensuring that the fitting retains its IP65 rating. Must be installed as detailed in enclosed instruction leaflet to guarantee IP65 protection.

The bollard gives a light distribution of 10m in diameter around its base.

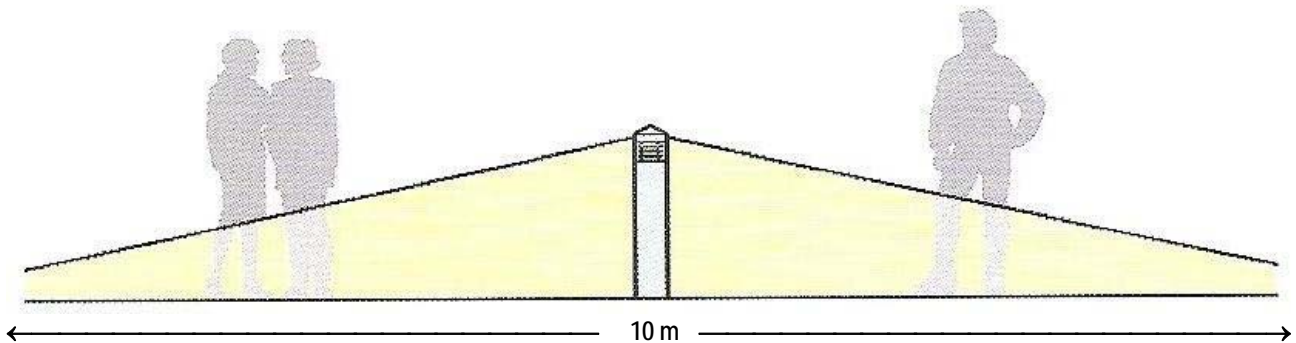

Accessories

This fitting is not available with integral photocell

Range

Part Number	Lamp & Wattage	Lumens Per Fitting	Circuit Watts
VOR-200-70HQI	70 WATT HQI	5600	104
VOR-200-70SON	70 WATT SON	6000	104

Dimensions

Diameter	Height
200mm	875mm